



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : H01S 5/068, 3/10, H01L 33/00	A1	(11) International Publication Number: WO 00/54380 (43) International Publication Date: 14 September 2000 (14.09.00)
--	----	---

(21) International Application Number: PCT/SE00/00292

(22) International Filing Date: 15 February 2000 (15.02.00)

(30) Priority Data:
9900536-5 17 February 1999 (17.02.99) SE(71) Applicant (for all designated States except US): ALTITUN AB
[SE/SE]; Isafjordsgatan 9, S-164 40 Kista (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ANDERSSON, Lars
[SE/SE]; Kristinavägen 7, S-177 56 Järfälla (SE).(74) Agents: ÖRTENBLAD, Bertil et al.; Noréns Patentbyrå AB,
Box 10198, S-100 55 Stockholm (SE).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: A METHOD OF CHARACTERISING A TUNEABLE LASER

(57) Abstract

A method of evaluating a tuneable laser (15) and determining suitable laser operation points, wherein said laser includes two or more tuneable sections in which injected currents can be varied, of which sections at least one is a reflector section and one is a phase section. The invention is characterised by leading part of the light emitted by the laser (15) to an arrangement which includes a Fabry-Perot filter (32) and a first detector (33) and a second detector (34), said detectors being adapted to measure the power of the laser and to deliver a corresponding detector signal (11, 12); arranging the detectors relative to the Fabry-Perot filter so that the detector signals (11, 12) will contain information relating at least to the wavelength of the detected light; sweeping the currents through the tuning sections (17, 18, 19) such as to pass through different current combinations; measuring the ratio between the two detector signals (11, 12) during said sweep, wherein the reflector current (17) is the inner sweep variable which is swept in one direction and then in an opposite direction back to its start value; and storing the control combination for said tuning currents when the ratio between the detector signals (11, 12) lies within a predetermined range signifying that the emitted light lies within one of a number of wavelengths given by the Fabry-Perot filter (32) and said ratio lies within said predetermined range for a given reflector current in both sweep directions of said reflector current.

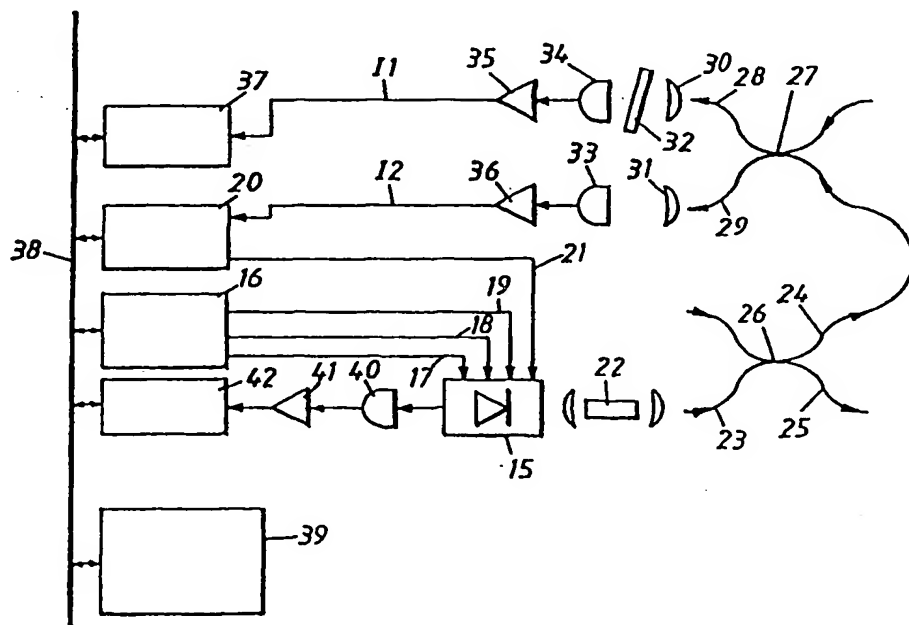

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A METHOD OF CHARACTERISING A TUNEABLE LASER

The present invention relates to a method of enabling a tuneable laser to be characterised quickly.

5

The method can be applied for evaluating and selecting lasers with respect to emitted wavelength and to find good operation points systematically.

10 Tuneable semiconductor lasers have a number of different sections through which current is injected, typically three or four such sections. The wavelength, power and mode purity of the lasers can be controlled by adjusting the current injected into the various sections. Mode purity implies that
15 the laser shall be in an operation point, i.e. at a distance from a combination of the drive currents where so-called mode jumps take place and where lasering is stable and side mode suppression is high.

20 In the case of telecommunications applications, it is necessary that the laser is able to retain its wavelength to a very high degree of accuracy and over very long periods of time, after having set the drive currents and the temperature. A typical accuracy in this respect is 0.1
25 nanometer and a typical time period is 20 years.

In order to be able to control the laser, it is necessary to map the behaviour of the laser as a function of the various drive currents. This is necessary prior to using the laser
30 after its manufacture.

Mapping of the behaviour of a laser is normally effected by connecting the laser to different measuring instruments and then varying the drive currents systematically. Such instruments are normally power meters, optical spectrum
5 analysers for measuring wavelength and sidemode suppression, and line width measuring devices. This laser measuring process enables all of these parameters to be fully mapped as a function of all different drive currents.

10 One problem is that lasers exhibit an hysteresis. As a result of these hystereses, the laser will deliver different output signals in the form of power and wavelength in respect of a given drive current set-up, i.e. with respect to a given operation point, depending on the path through which the
15 laser has passed with respect to the change in said drive currents in order to arrive at the working point in question. Thus, this means that a given drive current set-up will not unequivocally give the expected wavelength or power.

20 In the case of a tuneable laser, the wavelength of the emitted light is determined mainly by the current or voltage across the tuning sections. The power emitted is controlled by current to the gain section of the laser or by the current across said section.

25 When characterising a laser, all of the possible control combinations afforded by the tuning sections, or a subset of said sections, are investigated. During the characterising process, the emitted light is studied with respect to
30 wavelength and sidemode suppression and controlling the gain section with regard to power adjustment.

The enormous number of possible control combinations, typically tens of billions of which fewer than a hundred shall be selected, makes total mapping of the laser impossible in view of the large amount of data generated.

5

The present invention solves this problem and provides a method of quickly sorting away control combinations that do not result in correct wavelengths.

10

The present invention also relates to a method of evaluating a tuneable laser and determining suitable laser operation points for a laser that includes two or more tuneable sections in which injected current can be varied and of which at least one is a reflector section and one is a phase

15

section, wherein said method is characterised by leading part of the light emitted by the laser to an arrangement that includes a Fabry-Perot filter and a first and a second detector, said detectors being adapted to measure the power of the light and to deliver a corresponding detector signal;

20

arranging the detectors relative to the Fabry-Perot filter such that the data signals will contain information relating at least to the wavelength of the detected light; sweeping the currents through the tuning sections so as to pass through different current combinations; measuring the ratio

25

between the two detector signals during said sweeps; sweeping the reflector current in the inner sweep variable in one direction and then in the opposite direction back to its start value; and storing the control combination for the tuning currents when the ratio between the detector signals

30

lies within a predetermined range that indicates that the light emitted lies within one of a number of wavelengths given by the Fabry-Perot filter and said ratio lies within

said predetermined range for a given reflector current in both sweep directions of said current.

The invention will now be described in more detail with reference to exemplifying embodiments thereof and also with reference to the accompanying drawings, in which

- Figure 1 is a perspective, partially cut-away view of a DBR laser;

- Figure 2 is a sectional view of a tuneable Grating Coupled Sampled Reflector (GCSR) laser;

- Figure 3 is a sectional view of a Sampled Grating DBR laser; and

- Figure 4 is a schematic block diagram illustrating an arrangement which is used in accordance with the invention.

Shown in Figure 1 is a DBR laser which includes three sections, namely a Bragg reflector 1, a phase section 2 and a gain section 3. Each section is controlled by injecting current into respective sections through respective electric conductors 4, 5, 6.

Figure 2 is a sectional view of a tuneable Grating Coupled Sampled Reflector (GCSR) laser. Such a laser includes four sections, i.e. a Bragg reflector 7, a phase section 8, a coupler 9 and a gain section 10. Each of the sections is controlled by injecting current into respective sections.

Figure 3 is a sectional view of a Sampled Grating DBR laser that also includes four sections 11, 12, 13, 14, of which sections 11 and 14 are Bragg reflectors, section 13 is the phase section, and section 12 is the gain section.

These three laser types are common, although other types of lasers exist.

Although the invention is described below essentially with reference to a GCSR laser according to Figure 2, it will be understood that the invention is not too restricted to any particular type of tuneable semiconductor laser, but can be applied correspondingly with tuneable lasers other than those illustrated by way of example in the drawings.

The present invention relates to a method of evaluating tuneable lasers and determining suitable laser operation points. The laser may thus contain two or more tuneable sections in which injected current can be varied in a known manner. The laser is of the kind which includes at least one reflector section and one phase section.

Figure 4 is a block diagram which illustrates an arrangement used in accordance with the present invention. The reference numeral 15 identifies a GCSR laser, while the reference numeral 16 identifies current generators for injecting current into the reflector section, the phase section and the coupler section respectively of said laser, through respective conductors 17, 18 and 19. The power of the laser is controlled to its gain section by means of a power regulating circuit 20, via a conductor 21.

The laser emits light from the front mirror to a light conductor 23, for instance light fibre, via a lens pack 22. This light conductor leads the light to a light splitter or divider 26 which switches part of the light to another light conductor 24. The remainder of the light is led further in

the conductor 25. The light splitter 26 switches, e.g., 10% of the light from the conductor 23 to the conductor 24.

5 The light conductor 24 leads the light to a second light splitter or divider 27 which functions to divide the light equally between two light conductors 28, 29. A lens 30 and a lens 31 are disposed at respective ends of the light conductors. A Fabry-Perot filter 32 is provided in the beam path downstream of the lens 30. The filter 32 is well known
10 and will not therefore be described in more detail in this document. Fabry-Perot filters can be designed to exhibit a certain light transmission solely for certain wavelengths, normally wavelengths that are multiples of a given wavelength. The Fabry-Perot filter exhibits a deviating lower
15 or higher transmission at other wavelengths.

A first detector 33 is provided downstream of the lens 31, and a second detector 34 is provided downstream of the Fabry-Perot filter. The detectors 33, 34 function to measure the
20 power of the light and to deliver a corresponding detector signal to an A/D converter 37, via a respective amplifier 35, 36.

25 The A/D converter 37, the power regulating circuit 20 and the current generators 16 are all connected to a microprocessor 39 via a data bus 38. The microprocessor is adapted to control the current generators and the power regulating circuit in a desired and a well known manner, in response to the signals from the A/D converter 37 and the power
30 regulating circuit 20.

According to the invention, part of the forwardly emitted light is thus conducted to the first detector 31 and also to the second detector 34, via the Fabry-Perot filter 32.

- 5 According to the invention, the currents are swept through the tuning sections 18, 19, 21 such as to pass through different current combinations. The ratio between the two detector signals I1 and I2 is measured during said sweeps.
- 10 When sweeping the currents through the tuning sections, the reflector current is the inner sweep variable. It is meant by this that the reflector current is swept for different combinations of other tuning currents while holding said currents constant. The reflector current is swept first in
- 15 one direction and then in the opposite direction, back to its start value. For instance, the reflector current is swept from a zero value and up to its maximum value and then down to zero again.
- 20 By current control in the present document is meant that the current through the sections is controlled by current generators or, alternatively, by controlling the voltage across the sections.
- 25 In the case of the Figure 4 embodiment, the first detector, the second detector and the Fabry-Perot filter are placed in the proximity of the front mirror of the laser. Alternatively, the components may equally as well be placed in the proximity of the rear mirror of the laser, in which
- 30 case light emitted from the rear mirror of said laser is used to determine the wavelength.

The Fabry-Perot filter and the first and the second detector may be arranged relative to one another in a manner different to that shown in Figure 4, so as to detect at least wavelengths. The first and the second detector may be
5 arranged to measure light transmitted through the Fabry-Perot filter and/or light reflected towards the Fabry-Perot filter, such as to detect wavelengths.

The hysteresis effect exhibited by lasers causes the power
10 output of the laser in respect of certain reflector currents, with otherwise constant conditions, to be different due to the reflector current having taken its existing value by virtue of the reflector current having increased to said value or having decreased from a higher value. The wavelength
15 is also influenced by the hysteresis effect. Such operation points as those which lie in the regions of hysteresis with respect to the reflector current, or with respect to other tuning currents for those sections that exhibit hysteresis, are non-preferred operation points for a laser in operation.

20 Communication lasers shall be adapted to operate at certain given wavelengths that are included in a so-called channel plane, where each channel corresponds to a well defined wavelength. According to the invention, the Fabry-Perot
25 filter 32 is adapted to have a certain given transmission for each wavelength included in the channel plane.

When the ratio between the detector signals I_1/I_2 from the detectors 32, 33 lies within a predetermined range implying
30 that the emitted light lies within one of a number of wavelengths given by the Fabry-Perot filter and said ratio I_1/I_2 lies within said range for a given reflector current in

both sweep directions of the reflector current, the control combination for the tuning currents is stored in accordance with the invention.

5 This range is given by the permitted channel width in the channel plane.

10 These control combinations thus fulfil the criteria that will give desired wavelengths and not result in any hysteresis effect.

In certain cases, it is preferred that one or more other tuneable currents to sections that exhibit an hysteresis effect, excluding the reflector current, are swept so as to
15 determine whether or not hysteresis occurs in a contemplated operation point.

According to one preferred embodiment, the signal I2 is delivered from the first detector 33 to the power regulating
20 circuit 20. The regulating circuit is adapted to control the laser so that said laser will emit light at a constant power. This enables the ratio I1/I2 to be followed very easily in determining possible operation points..

25 According to another preferred embodiment of the invention, a monitored diode is placed on the side of the laser opposite to that side on which the first and the second detectors are placed, said monitor diode being caused to measure the light emitted by the laser. The detector signal is led through an
30 amplifier 41 to an A/D converter 42, whose output signal is delivered to the microprocessor 39. In this embodiment, one or more of the tuneable currents is chosen so as to minimise

the ratio between the power of the rearwardly emitted light and the power of the forwardly emitted light, thereby enabling an optimum operation point for a channel to be selected from said possible operation points.

5

The monitor diode 40 is placed adjacent the rear mirror of the laser in the Figure 4 embodiment.

10

It is highly preferred with a number of the possible operation points taken out to measure the wavelength emitted by the laser until an operation point has been obtained with each desired wavelength, wherewith the control combination for each operation point is stored. Thus, one control combination for each channel in the channel plane will be stored in the memory of the microprocessor.

15

20

It will be evident from the foregoing that the use of a Fabry-Perot filter enables all those control combinations that do not fulfil the criterion that the ratio between the currents I_1/I_2 shall lie within a certain given range to be sorted out. Moreover, it is sufficient for communications purposes to identify one control combination for each wavelength in the channel plane that lies in a region in which the laser exhibits no hysteresis.

25

The present invention thus solves the problem mentioned in the introduction.

30

Although different embodiments have been described, and therewith in respect of a GCSR laser, it will be obvious that the structural design of the described arrangement can be

varied while achieving the same result. The invention can also be applied to lasers of a type other than GCSR lasers.

5 It will therefore be understood that the present invention is not restricted to the aforescribed and illustrated exemplifying embodiments thereof and that variations can be made within the scope of the following Claims.

CLAIMS

1. A method of evaluating a tuneable laser (15) and determining suitable laser operation points, wherein said
5 laser includes two or more tuneable sections in which injected currents can be varied, of which sections at least one is a reflector section and one is a phase section, characterised by leading part of the light emitted by the laser (15) to an arrangement which includes a Fabry-Perot
10 filter (32) and a first detector (33) and a second detector (34), said detectors being adapted to measure the power of the laser and to deliver a corresponding detector signal (I1, I2); arranging the detectors relative to the Fabry-Perot filter so that the detector signals (I1, I2) will contain
15 information relating at least to the wavelength of the detected light; sweeping the currents through the tuning sections (17, 18, 19) such as to pass through different current combinations; measuring the ratio between the two detector signals (I1, I2) during said sweep, wherein the
20 reflector current (17) is the inner sweep variable which is swept in one direction and then in an opposite direction back to its start value; and storing the control combination for said tuning currents when the ratio between the detector signals (I1, I2) lies within a predetermined range signifying
25 that the emitted light lies within one of a number of wavelengths given by the Fabry-Perot filter (32) and said ratio lies within said predetermined range for a given reflector current in both sweep directions of said reflector current.

30
2. A method according to Claim 1, characterised in that the Fabry-Perot filter (32) exhibits a certain transmission

for each wavelength included in a channel plane which contains desired wavelengths and exhibits a transmission that deviates therefrom with respect to other wavelengths.

5 3. A method according to Claim 1 or 2, characterised by delivering the signal from one detector (33) at the front mirror of the laser to a power regulating circuit (20) which is adapted to control the laser (15) to emit light with a constant power from the front mirror.

10

4. A method according to Claim 1, 2 or 3, characterised by causing a monitor diode (40) placed on the side of the laser (15) opposite to that side on which the first (32) and the second (33) detectors are placed to measure the light emitted
15 by the laser; and adjusting one or more of the tuning currents so as to minimize the ratio between the power of the rearwardly emitted light and the power of the forwardly emitted light, therewith optimising an operation point for the laser (15).

20

5. A method according to Claim 1, 2, 3 or 4, characterised by sweeping one or more other tuning currents to sections that exhibit an hysteresis effect, excluding the reflector current, so as to determine whether or not hysteresis occurs
25 in a contemplated operation point.

30

6. A method according to Claim 1, 2, 3, 4 or 5, characterised by measuring the wavelength transmitted by the laser (15) in a number of the possible operation points taken out until one operation point has been obtained for each desired wavelength, and storing the control combination for each operation point.

Fig. 1

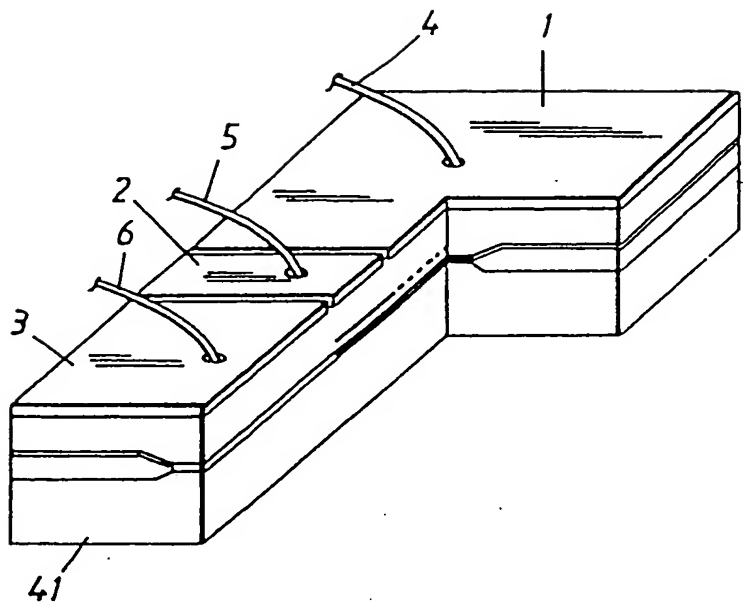


Fig. 2

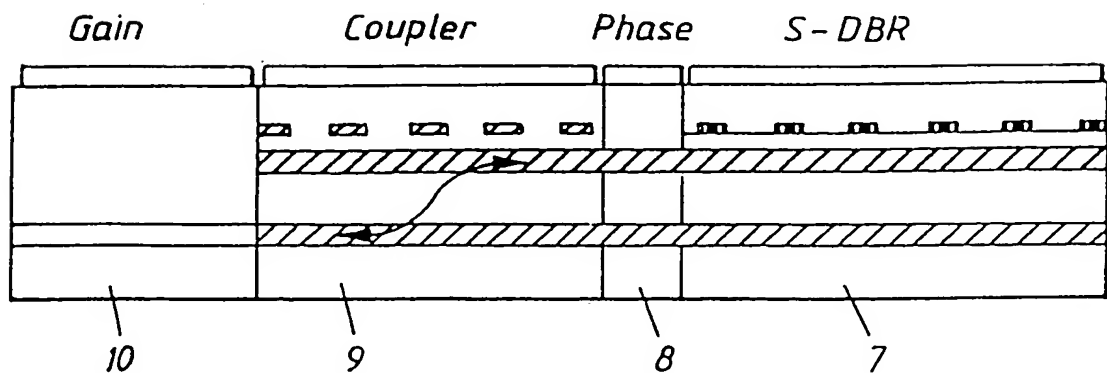


Fig. 3


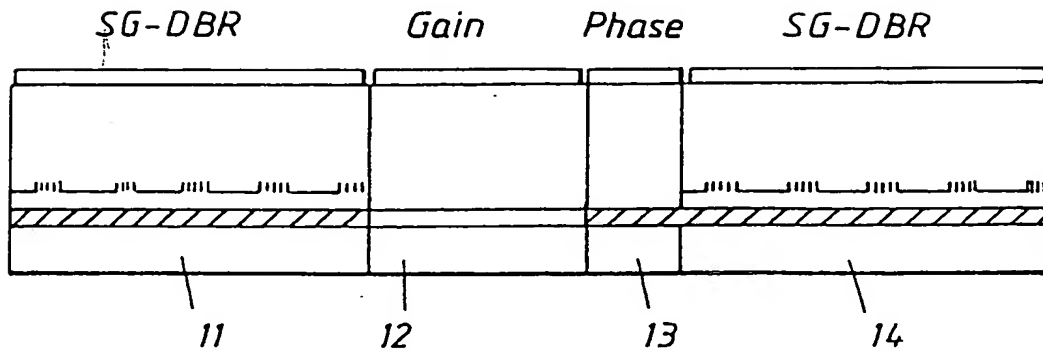


Fig. 4

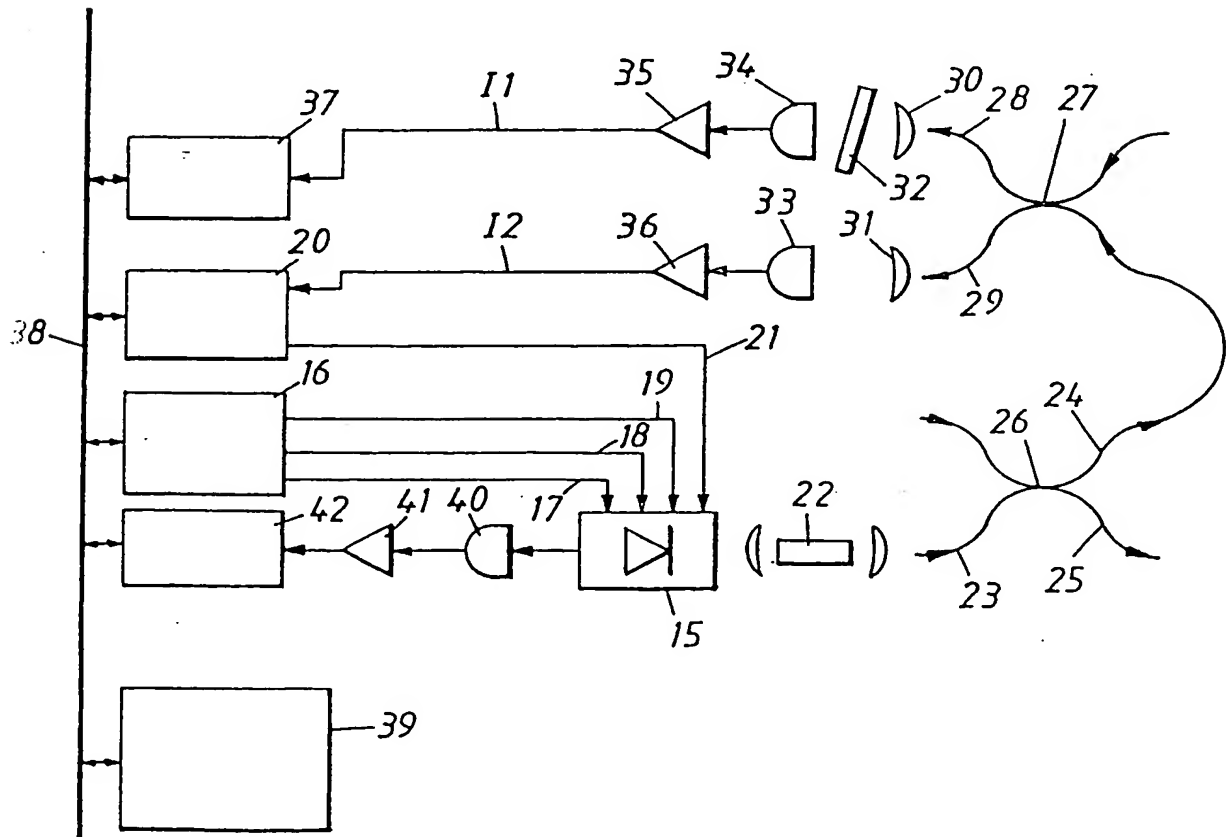

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00292

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H01S 5/068, H01S 3/10, H01L 33/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H01S, H01L, G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0529732 A1 (N.V. PHILIPS' GLOEILAMPENFABRIEKEN), 3 March 1993 (03.03.93), figures 1,2, see whole document --	1-3,5-6
Y	EP 0774684 A2 (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.), 21 May 1997 (21.05.97), page 33, line 39 - line 44; page 26, figure 33 --	1-3,5-6
Y	GB 2163286 A (INTERNATIONAL STANDARD ELECTRIC CORPORATION (USA-DELAWARE)), 19 February 1986 (19.02.86), see whole document --	1-3,5-6



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"1" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"C" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

21 June 2000

Date of mailing of the international search report

28-06-2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

MÅNS MARKLUND/EE

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00292

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4792956 A (GEORGE W. KAMIN), 20 December 1988 (20.12.88) ----- A	1-6

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/SE 00/00292

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0529732	A1	03/03/93	DE	69200654 D,T	24/05/95
				JP	5335674 A	17/12/93
				US	5359613 A	25/10/94

EP	0774684	A2	21/05/97	JP	9197457 A	31/07/97
				US	5835650 A	10/11/98
				JP	10041589 A	13/02/98

GB	2163286	A	19/02/86	DE	3421851 A,C	19/12/85
				ES	544112 A	16/12/86

US	4792956	A	20/12/88	CA	1315332 A	30/03/93
				DE	3715101 A,C	19/11/87
				FR	2598860 A,B	20/11/87
				GB	2190783 A,B	25/11/87
				IL	82315 D	00/00/00
				IT	1210728 B	20/09/89
				IT	8767408 D	00/00/00
				JP	1877244 C	07/10/94
				JP	5087156 B	15/12/93
				JP	62273788 A	27/11/87